SFP28-25G-ER

25Gbps SFP28 Transceiver, Single Mode, 40km Reach

Product Features

- Supports up to 25.78Gbps bit rates
- Hot-pluggable SFP+ footprint
- Up to 40km for SMF transmission
- Compliant with SFP+ MSA and SFF-8472 with duplex LC receptacle
- Compatible with RoHS
- Single +3.3V power supply
- Real Time Digital Diagnostic Monitoring
- Operating case temperature:
  Standard: 0 to +70°C

HYTOPTODEVICE

Applications


- 25GBASE-ER

Description

The SFP28 transceivers are high performance, cost effective modules supporting data rate of 25.78Gbps and 40km transmission distance with SMF.

The transceiver consists of three sections: a DML laser transmitter, a APD photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement and SFF-8472 digital diagnostics functions.

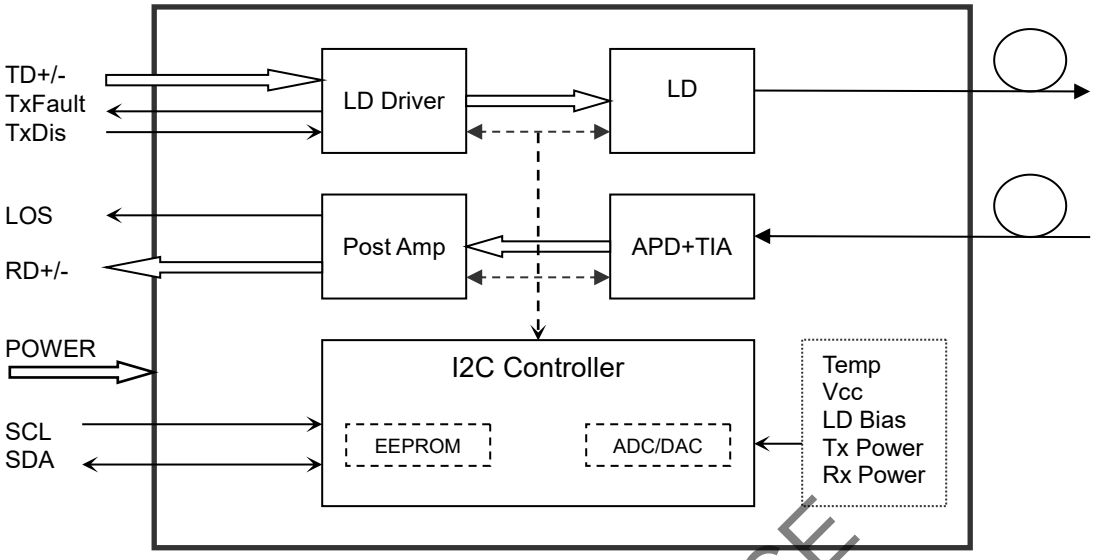

Transceiver functional diagram

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	T_s	-40	-	85	ºC	
Relative Humidity	R_H	5	-	95	%	
Power Supply Voltage	V_{CC}	-0.3	-	4	V	
Signal Input Voltage	V_{SI}	Vcc-0.3	-	Vcc+0.3	V	

HYTOPTODEVICE

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Tcase	0		70	ºC	
Power Supply Voltage	V_{CC}	3.14	3.3	3.47	V	
Power Supply Current	I_{CC}	-		600	mA	
Data Rate	BR		25.78		Gbps	TX Rate/RX Rate
Transmission Distance	TD		40		km	
Coupled fiber	Single mode fiber					9/125um SMF

Optical and Electrical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Note
Transmitter							
Centre Wavelength		λc	1295		1325	nm	
Average Launched Power		P_O	0		+6.0	dBm	1
Average Launched Power(Laser Off)		P_{off}	-	-	-30	dBm	
Spectrum Bandwidth(-20dB)		Δλ	-	-	2.7	nm	
Side-Mode Suppression Ratio		SMSR	30	-	-	dB	
Transmitter and Dispersion Penalty		TDP			1	dB	
Extinction Ratio		ER	3.5		-	dB	
Output Eye Mask		Compliant with IEEE 802.3cc					
Data Input Swing Differential		V_{IN}	180		850	mV	2
Input Differential Impedance		Z_{IN}	90	100	110	Ω	
TX Disable	Disable		2.0		Vcc	V	
	Enable		0		0.8	V	
TX Fault	Fault		2.0		Vcc	V	
	Normal		0		0.8	V	
Receiver							
Input Optical Wavelength		λ_{IN}	1295	-	1325	nm	
Receiver Sensitivity-AVG		P_{Sens}			-19	dBm	3
Receiver Sensitivity-OMA		$P_{Sens-OMA}$			-18.2	dBm	3
Input Saturation Power (Overload)		P_{SAT}	-6	-	-	dBm	3
Los Of Signal Assert		P_A	-30	-	-	dBm	
Los Of Signal De-assert		P_D	-	-	-20	dBm	
LOS -Hysteresis		P_{Hys}	0.5			dB	
Data Output Swing Differential		V_{out}	300		900	mV	4
LOS		High	2.0		Vcc	V	
		Low			0.8	V	

HYTOPTODEVICE

Notes:

1. The optical power is launched into SMF.

2. PECL input, internally AC-coupled and terminated.

3. Measured with a PRBS 231-1 test pattern @25.78Gps, BER ≤5×10-5.

4. Internally AC-coupled.

Timing and Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	t_on			1	ms
Tx Disable Assert Time	t_off			10	μs
Time To Initialize, including Reset of Tx Fault	t_init			300	ms
Tx Fault Assert Time	t_fault			100	μs
Tx Disable To Reset	t_reset	10			μs
LOS Assert Time	t_loss_on			100	μs
LOS De-assert Time	t_loss_off			100	μs
Serial ID Clock Rate	f_serial_clock		100	400	KHz
MOD_DEF (0:2)-High	V_H	2		Vcc	V
MOD_DEF (0:2)-Low	V_L			0.8	V

HYTOPTODEVICE

Diagnostics


Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to 70	°C	±3°C	Internal
Voltage	3.0 to 3.6	V	±3%	Internal
Bias Current	0 to 100	mA	±10%	Internal
TX Power	0 to 6	dBm	±3dB	Internal
RX Power	-19 to -6	dBm	±3dB	Internal

Digital Diagnostic Memory Map

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).


The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

The digital diagnostic memory map specific data field defines as following.

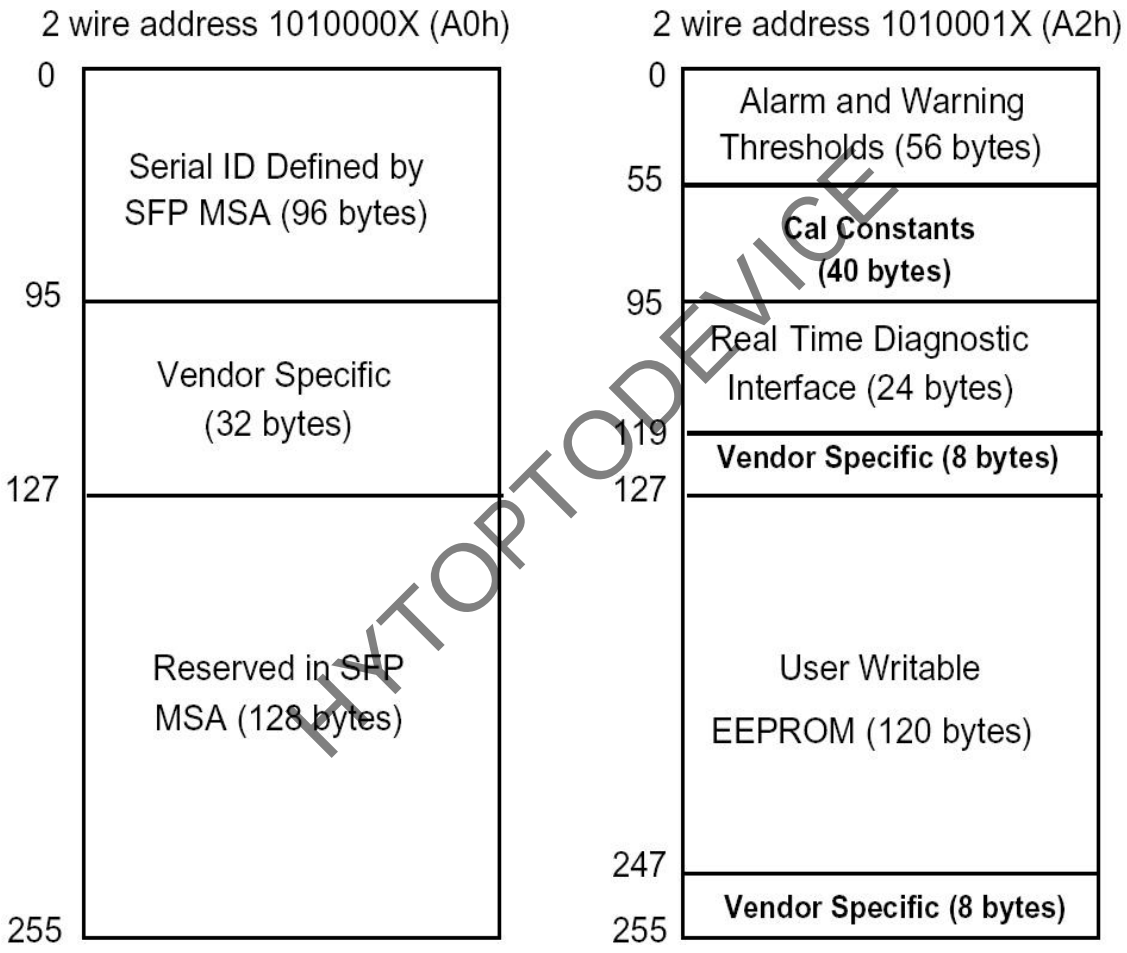

HYTOPTODEVICE

Pin Descriptions

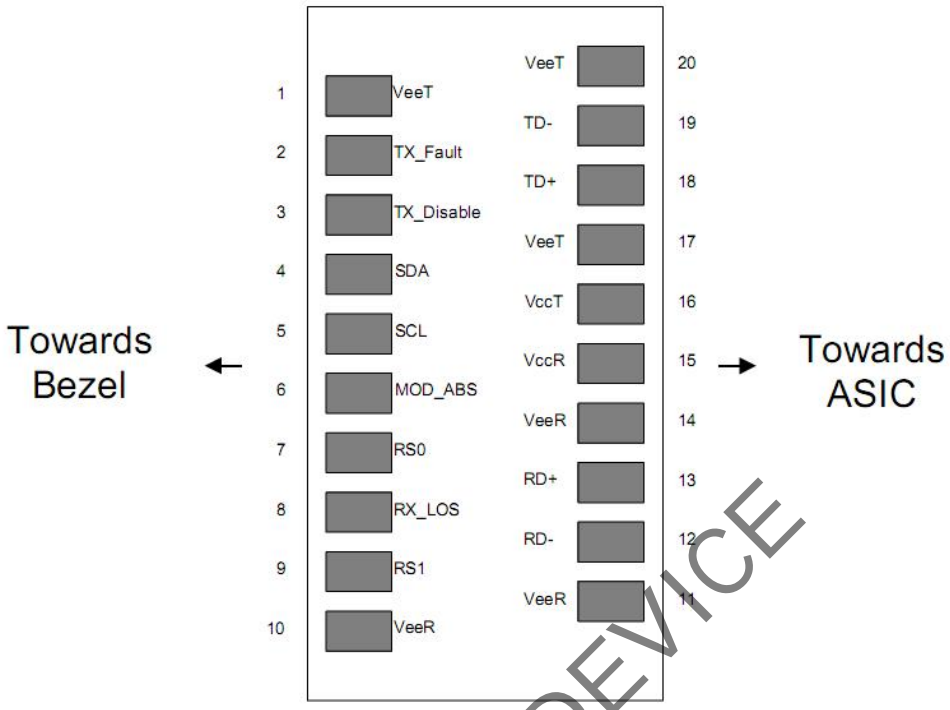


Pin	Signal Name	Description	Plug Seq.	Notes
1	V_{EET}	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	SDA	SDA Serial Data Signal	3	
5	SCL	SCL Serial Clock Signal	3	
6	MOD_ABS	Module Absent. Grounded within the module	3	
7	RS0	Not Connected	3	
8	LOS	Loss of Signal	3	Note 3
9	RS1	Not Connected	3	
10	V_{EER}	Receiver ground	1	
11	V_{EER}	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 4
13	RD+	Received Data Out	3	Note 4
14	V_{EER}	Receiver ground	1	
15	V_{CCR}	Receiver Power Supply	2	
16	V_{CCT}	Transmitter Power Supply	2	
17	V_{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 5

HYTOPTODEVICE

19	TD-	Inv. Transmit Data In	3	Note 5
20	V_{EET}	Transmitter Ground	1	


Notes:
Plug Seq.: Pin engagement sequence during hot plugging.
1) TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
2) Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3) LOS is open collector output. Should be pulled up with 4.7k~10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
4) RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
5) TD-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

Recommended Interface Circuit

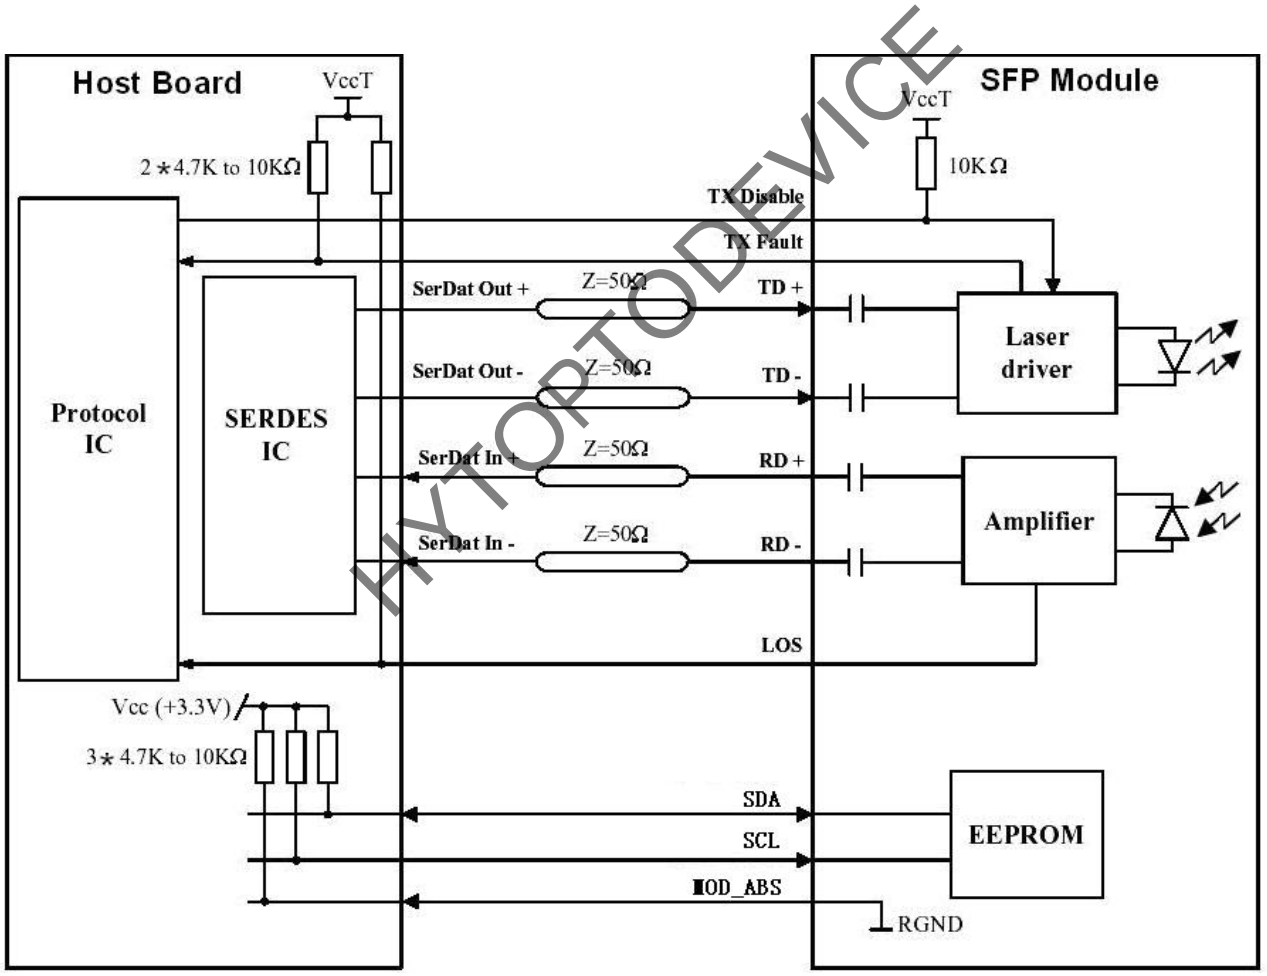

HYTOPTODEVICE

Mechanical Dimensions

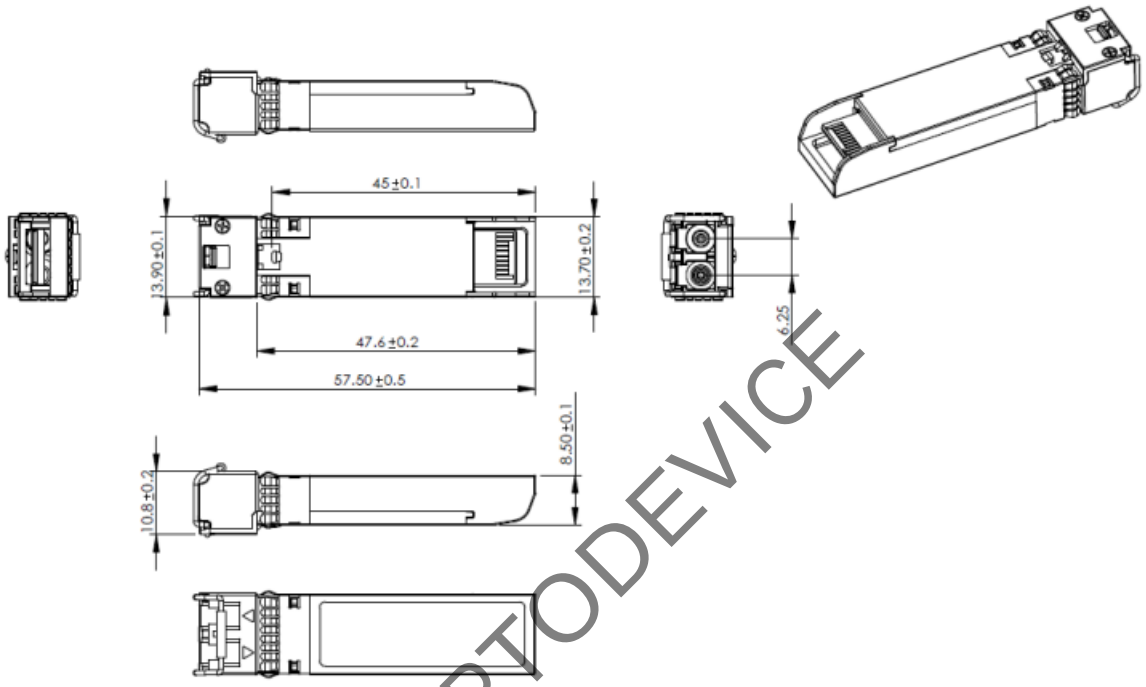

HYTOPTODEVICE

Ordering information

Part Number	Product Description
SFP28-25G-ER	1310nm, 25.78Gbps, LC, 40km, 0°C~+70°C, with DDM

For More Information

Tel:+86-13590132518
E-mail : sale@hytoptodevice.com
Web: https://www.hytoptodevice.com